



2018 FORECAST & CREATED

NAN YA



TPU FILM MISCELLANEOUS

NAN YA MATERIAL CHALLENGE NEW VISION WITH YOU

Various & Composites, Taking You to Run Out of Lightweight & Avant- Garde

I

INTRODUCTION

Because of highly vertical integration. Nan Ya TPU Film material which has lots of experience in raw material supply, development, manufacture, process technology, and final, application.

We dedicated to insisting our quality on providing you most concerned about.



And lead the trend in the non- toxic environment, let you enjoy healthy zero distance.

Our material also have International Certification, security & free of burden,

so we can cooperation with famous brand. In the feature, we will continue sustainable development determination.

Let's contribute to the environment protection.

M

MEDICAL USE

Our quality, insist on providing you most concerned about

Product Feature & Information:

- * Extremely waterproof, transparent, easy to printing, wind-break, anti-aging, weather resistant, long- term skin contact permissible, and anti- bacterial.
- * Repeated high pressure air- filled, light, biocompatible (without solvent,without any cells harmed after long- term skin contact), compatible with anti- microbes.
- * Without organic solvents, heavy metals, azo dyes, passing the 168 substances of REACH SVHC (Substances of Very High Concern, SVHC) screening under the EU REACH regulation, no allergic reaction caused by exposure to TPU leather, natural, and passing the bio- compatibility test ISO- 10993, suitable for chronic bedridden patients.



M

MEDICAL USE

TPU Film Specification:

TPU resin Hardness (shore A)	Tensile Strength (kg/ cm ²)		Elongation (%)		Tear Strength (kg/ cm)		100% Modulus (kg/ cm ²)		300% Modulus (kg/ cm ²)	
	MD	CD	MD	CD	MD	CD	MD	CD	MD	CD
80A~ 90A	200 ↑	200 ↑	300 ↑	300 ↑	30 ↑	30 ↑	35 ↑	35 ↑	65 ↑	65 ↑
90A~95A	250 ↑	250 ↑	350 ↑	350 ↑	50 ↑	50 ↑	45 ↑	45 ↑	75 ↑	75 ↑
95A ↑	300 ↑	300 ↑	250 ↑	250 ↑	70 ↑	70 ↑	50 ↑	50 ↑	85 ↑	85 ↑


Application:

- * Surgical gowns (Surgical caps and surgical shoe covers) made from TPU materials.
- * Mattress tubes and bedspreads of medical air mattresses.
- * Cooler bags, bandages, plasma bags, condoms, surgical permeable tapes made from TPU film.
- * Medical devices and instruments.




Our Quality, Insist On Providing You Most Concerned About

Nylon TPU Synthetic Leather:

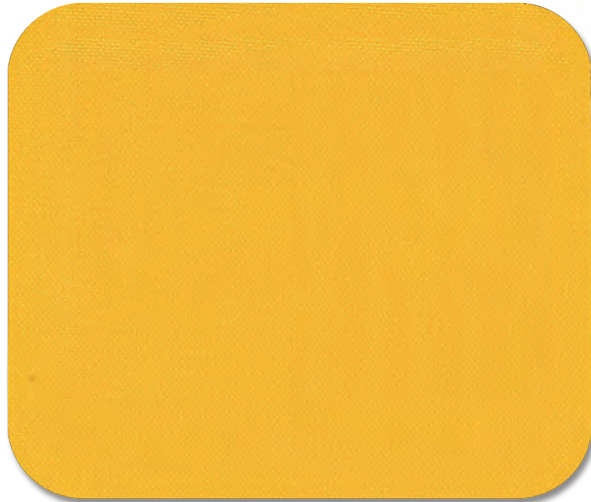

Substate	Tensile Strength (kg/ 3cm)		Elongation (%)		Tear Strength (kg/ cm)		Peel Strength (kg/ 3cm)		Seal Strength (kg/ 3cm)	
	MD	CD	MD	CD	MD	CD	MD	CD	MD	CD
NBC (70D)	25 ↑	20 ↑	20 ↑	20 ↑	0.6 ↑	0.6 ↑	3 ↑	3 ↑	20 ↑	20 ↑
NCD (210D)	40 ↑	25 ↑	25 ↑	25 ↑	1.0 ↑	1.0 ↑	3 ↑	3 ↑	25 ↑	25 ↑
NEB NEP (420D)	50 ↑	30 ↑	25 ↑	25 ↑	2.0 ↑	2.0 ↑	3 ↑	3 ↑	30 ↑	30 ↑
NMA (840D)	55 ↑	35 ↑	30 ↑	30 ↑	3.0 ↑	3.0 ↑	3 ↑	3 ↑	30 ↑	30 ↑
NNA (1680D)	120 ↑	80 ↑	30 ↑	30 ↑	5.0 ↑	5.0 ↑	3 ↑	3 ↑	30 ↑	30 ↑

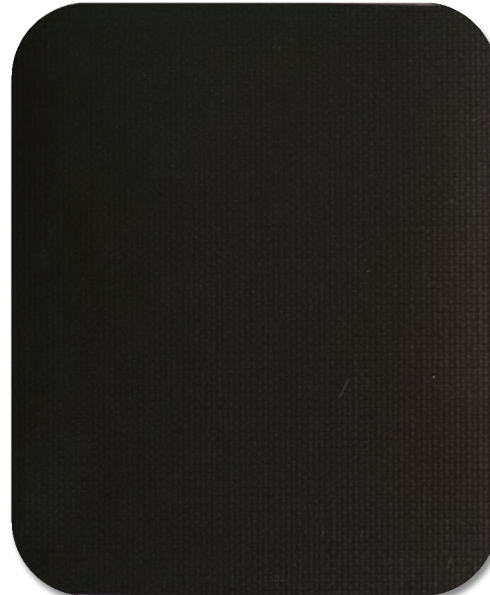

CERTIFICATE

Intertek

Certification Name:

F.D.A. Regulation on Resinous
and Polymeric Coating.

Material:

TPU/ NYLON Leather. Black fabric
with TPU film (glossy side)

Test Result:

Chloroform Soluble Extractive

*In Water 0.05mg/ in²

*In Heptane 0.01mg/ in²

*In 8% Alcohol 0.11mg/ in²

Test Report

Number : TWNC00532799

Date : Aug 03, 2016

Applicant: Nan Ya Plastics Corporation
NO. 55, Wei Wang Street., Shulin Dist.,
New Taipei City, Taiwan

Sample Description:

One (1) group of submitted samples said to be :


Item Name	: TPU/Nylon Leather
Item No.	: F3DNMAS6060580
Quantity	: 6 pieces
Country of Origin	: Taiwan
Date Sample Received	: Jul 07, 2016
Date Test Started	: Jul 07, 2016

Test Conducted:

As requested by the applicant, for details please refer to attached pages.

Authorized by:

On Behalf of Intertek Testing Services
Taiwan Limited



Matt Wang
Sr. Manager



Page 1 of 5

Intertek Testing Services Taiwan Ltd.

8F., No. 423, Ruiguang Rd., Neihu District, Taipei 11492, Taiwan, R.O.C.

全國公證檢驗股份有限公司

11492 台北市內湖區瑞光路 423 號 8 樓

Tel: (+886-2) 6602-2888 • 2797-8885 Fax: (+886-2) 6602-2410

CERTIFICATE

Intertek

Certification Name:

F.D.A. Regulation on Resinous and Polymeric Coating.


Material:

TPU/ NYLON Leather. Black fabric with TPU film (glossy side)

Test Result:

Chloroform Soluble Extractive

*In Water	0.05mg/ in ²
*In Heptane	0.01mg/ in ²
*In 8% Alcohol	0.11mg/ in ²

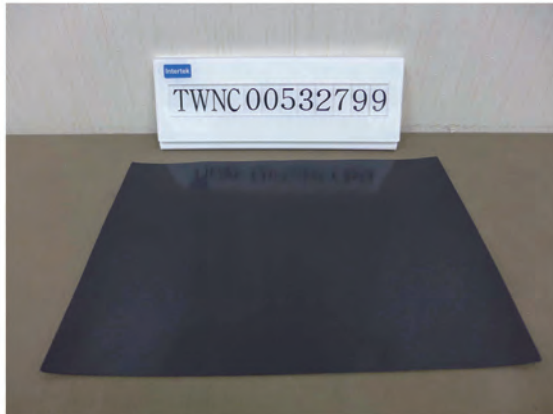

End of Report

Test Report

Number : TWNC00532799

Test Conducted

Test For F.D.A. Regulation On Resinous And Polymeric Coating

As per with reference to the U.S. 21 CFR Food and Drug Administration part 175.300, clause (c)(4).

I. Condition Of Contact In Actual Use :
Hot Filled Or Pasteurized Below 150°F (65.6°C).

II. Test Results :
Test Item

	<u>Result</u> (mg/in ²)
	<u>Black fabric with TPU film (glossy side)</u>
(A) Chloroform Soluble Extractive In Water	0.05
(B) Chloroform Soluble Extractive In Heptane	0.01
(C) Chloroform Soluble Extractive In 8% Alcohol	0.11



Page 2 of 5

Intertek Testing Services Taiwan Ltd.

8F., No. 423, Ruiguang Rd., Neihu District, Taipei 11492, Taiwan, R.O.C.

全國公證檢驗股份有限公司

11492 台北市內湖區瑞光路 423 號 8 樓

Tel: (+886-2) 6602-2888 · 2797-8885 Fax: (+886-2) 6602-2410

CERTIFICATE

Intertek

Certification Name:

Mould Resistane Test with
Reference to ASTM G21- 09.

Material:

TPU Coated NYLON Fabric-
(A) TPU Side
(B) NYLON Side

Test Result:

TPU & NYLON two sides are
(2X2 inch) all evaluated
as grade 0
*0- None (no growth on
specimen surface)

Test Report

Applicant: Nan Ya Plastics Corporation
NO. 55, Wei Wang Street., Shulin Dist.,
New Taipei City, Taiwan

Number : TWNC00368798

Date : Jun 09, 2014

Sample Description:


Four (4) pieces of submitted samples said to be :

Item Name	: TPU Coated Nylon Fabric - (A)TPU Side, (B)Nylon Side
Item No.	: POPLON NCD
Color	: Blue
Quantity	: 4 Pieces
Date Sample Received	: Apr 23, 2014
Date Test Started	: Apr 25, 2014

Test Conducted:

As requested by the applicant, for details please refer to attached pages.

Authorized by:
On Behalf of Intertek Testing Services
Taiwan Limited


K. Y. Liang
Director



Page 1 of 5

Intertek Testing Services Taiwan Ltd.
8F., No. 423, Ruiguang Rd., Neihu District, Taipei 11492, Taiwan, R.O.C.
全國公證檢驗股份有限公司
11492 台北市內湖區瑞光路 423 號 8 樓
Tel: (+886-2) 6602-2888 · 2797-8885 Fax: (+886-2) 6602-2410

CERTIFICATE

Intertek

Certification Name:

Mould Resistane Test with
Reference to ASTM G21- 09.


Material:

TPU Coated NYLON Fabric-
(A) TPU Side
(B) NYLON Side

Test Result:

TPU & NYLON two sides are
(2X2 inch) all evaluated
as grade 0

*0- None (no growth on
specimen surface)

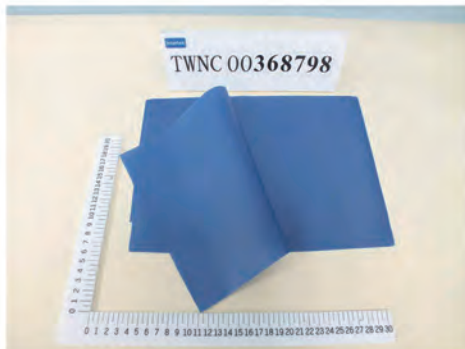

End of Report

Test Report

Number : TWNC00368798

Test Conducted

Mould Resistance Test

With Reference To ASTM G21-09

Mould Culture Used : *Aspergillus niger* (ATCC 9642)
Penicillium pinophilum (ATCC 11797)
Chaetomium globosum (ATCC 6205)
Glucocladium virens (ATCC 9645)
Aureobasidium pullulans var. melanogenum (ATCC 15233)

Culture Medium : Nutrient-Salts Agar

Incubation Period : 28 Days

Incubation Temperature : 28 °C

Test Specimen : Nylon side of submitted sample (2 x 2 inch)

Result :

Rating* At The Specific Period Of Incubation (Day)			
7 th	14 th	21 st	28 th
0	0	0	0

Test Specimen : TPU submitted sample (2 x 2 inch)

Result :

Rating* At The Specific Period Of Incubation (Day)			
7 th	14 th	21 st	28 th
0	0	0	0

Remark : * = Rating scale ranking from 0 to 4 and each number represents the degree of mould growth observed on the specimen surface.

- 0 - None (no growth on specimen surface.)
- 1 - Traces of growth (less than 10%).
- 2 - Light growth (10%-30%).
- 3 - Medium growth (30%-60%).
- 4 - Heavy growth (60% to complete coverage).

SGS

Vitro cytotoxicity
(test on extracts)

One sample of woven taffeta fabric with TPU coating

Viability of the all test sample is 50~79%.

Textile Laboratory		No: TXB0481 /2015 /LI		Date: Dec. 04, 2015		Page 1 of 2	
Test Report Nan Ya Plastics Corporation No. 55, Weiwang St., Shulin District, New Taipei City, Taiwan							
The following sample was submitted and identified by applicant as:							
Sample Description	:	One sample of woven taffeta fabric with TPU coating					
Color	:	Blue					
Fiber Content	:	Nylon					
Fabric Weight	:	218g/m ²					
Construction	:	70D					
Style No.	:	F3TNBC0305808FK					
Manufacturer/Vendor	:	Nan Ya Plastics Corporation					
Country of Origin	:	Taiwan					
Applicant	:	Nan Ya Plastics Corporation					
Sample Receiving Date	:	Nov. 09, 2015					
Test Performance Period	:	Nov. 09, 2015 to Dec. 04, 2015					
Test Performed	:	Selected test(s) as requested by applicant.					
Test Results	:	For further details, please refer to the following page(s).					

Signed for and on behalf of
SGS Taiwan Ltd.

Ronnie Chang

Chang Chia Hao, Ronnie
Supervisor

Unless otherwise stated, the results given in this test report refer only to the sample(s) tested, and such sample(s) are retained for 3 months only. This test report cannot be reproduced, without prior written permission of the Company.

*This document is issued by the Company subject to its General Conditions of Service printed separately, available on request or accessible at www.sgs.com.tw and its documents, subject to Terms and Conditions for Electronic Documents www.sgs.com.tw/portal/StaticContent/Condition/term-e-document

Resumes in drawn in the issuance of faculty, investigation and production items defined Taiwan. Any failure of this document is required that information contained herein reflects the use of or intervention into and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not constitute parties to a transaction their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. | No. 55 Weiwang Road, New Taipei District, New Taipei City, Taiwan | 台北市士林区威旺路55号 21楼
 (886)21-2298-2299 | (886)21-2298-2222 | www.sgs.com.tw

Member of the SGS Group

Texture Laboratory

Test Report

No: TXB0481 /2015 /LI

Date: Dec. 04, 2015

Page 2 of 2

TEST(\$\$) REQUESTED: Tests for in vitro cytotoxicity (test on extracts)

CONCLUSION:

The cytotoxicity of the sample was grade 2, which is slight cytotoxic. The negative controls and the positive controls in the test performed as anticipated.

TEST METHOD(\$\$):

ISO 10993-5:2009 Biological evaluation of medical devices — Part 5: Tests for in vitro cytotoxicity

Test Article: The sample preparation was in accordance with ISO 10993-12:2004. Extraction condition is 24h at 37 °C in culture medium. The volume of extract is determined by the standard surface area.

Cell lines: L-929 cells (mouse fibroblast)

Medium: 1640 medium (Gibco) with 10% FBS

Chromogenic reagent: MTT

General Procedure: The prepared cell suspension was seeded in 96-well culture plate, set blank control, negative control, the positive control and the test sample group, inoculated with 100μL of cell suspension per well. Set CO₂ incubator (5% CO₂, the same below) 37 °C cultured for 24 h, discard the original culture medium. Adding fresh cell culture medium in blank control group, added extracts of the negative control in negative control group, added positive control solution or positive control extracts in the positive control group, added the extracts of the experimental material in the test sample. The test volume is 100μL per well, set CO₂ incubator cultured for 24h. Observed cell morphology under the microscope. Added 20μL 5g/L MTT solution, cultured 4h, discarded liquid, added 150μL DMSO and shaken 10min. Measure the absorbance at 570 nm and 630 nm and RGR was calculated, to determine the cytotoxic response.

TEST RESULT(\$\$):

Tests for in vitro cytotoxicity (test on extracts)

Viability of the all test sample is 50 ~ 79%, cell growth state in negative control is well, the cell viability is ≥100%, the cytotoxicity of the sample was grade 2

Test results only apply to samples

Cytotoxicity scale	Viability of the test sample/%
0	≥100
1	80 ~ 99
2	50 ~ 79
3	30 ~ 49
4	0 ~ 29

Tested by relevant SGS laboratory.

*** End of Report ***

"Unless otherwise stated, this document is the firm's report (only due to this recipient) (internal, and must remain confidential) (or internal but is confidential)" This test report cannot be reproduced, except in full, without prior written permission of the Company.

"This document is issued by the Company subject to its General Conditions of Service printed or available on request or retrievable at www.sgsl.com.cn and www.sgsl.com.cn and, for electronic format documents, included in Terms and Conditions for Electronic Documents ([http://www.sgsl.com.cn/StaticContent/Service/Document-Service.html](http://www.sgsl.com.cn/StaticContent/Service/Document/Document-Service.html)).

Attention is drawn to the limitation of liability, assumption and jurisdiction before defined below. Any notice of this document is intended that information contained herein reflects the Company's findings at the time of the intervention only and within the limits of Client's instructions. It may The Company's will responsibility to the Client, and this document cannot be reproduced without the permission from the Company, any unauthorized alteration, forgery or falsification in the content or appearance of this document is prohibited and offenders may be prosecuted to the fullest extent of the law."

SGS Taiwan Ltd.
台灣商標檢驗股份有限公司
No. 31, Wu-Chuan Road, Jinn-Yuan Industrial Park, Wu-Chuan District, New Taipei City, Taiwan (新北市五權路31號)
Tel: (886-2) 2239-5252
Fax: (886-2) 2239-5257
www.sgsl.com.cn
Member of the SGS Group

CERTIFICATE



Certification Name:

ISO 10993- 10: 2010


- * Animal imitation, Test-
Single- Exposure Test
- * Closed- Patch Test
(buehler test)

Material:

One Sample of Woven Fabric
70D NYLON Taffeta Coating
TPU.

Test Result:

- * Animal Imitation Test- Single-
At Each Observation Time point.
The Highest Integral is 0
(Evaluated as Negligible).
- * Closed- Patch Test:
The Sensitized Rate of the
Sample on Guinea Pigs is 0%
(evaluated as very gently).

Textile Laboratory	No: TX33263 /2016 /JA	Date: June 20, 2016	Page 1 of 5
Test Report			
Nan Ya Plastics Corporation No. 55, Wei Wang St., Shu Lin District, New Taipei, Taiwan, R.O.C.			
The following sample was submitted and identified by applicant as:			
Sample Description	:	One sample of woven fabric 70D nylon taffeta coating TPU	
Color	:	Blue	
Fiber Content	:	Nylon Fabric Coating TPU	
Fabric Weight	:	218g/m ²	
Style No.	:	F3TNBC0305808FK	
Manufacturer/Vendor	:	Nan Ya Plastics Corporation	
Country of Origin	:	Taiwan	
Applicant	:	Nan Ya Plastics Corporation	
Sample Receiving Date	:	Mar. 30, 2016	
Test Performance Period	:	Mar. 30, 2016 to June 17, 2016	
Test Performed	:	Selected test(s) as requested by applicant.	
Test Results	:	For further details, please refer to the following page(s).	
Signed for and on behalf of SGS Taiwan Ltd.			
			
Chang Chia Hao, Ronnie Asst. Manager			
"Unless otherwise stated the results shown in this test report refer only to the sample(s) tested, and each sample(s) are retained for 2 months only." This test report cannot be reproduced, except in full, without prior written permission of the Company.			
"This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm, and for electronic format documents, subject to Terms and Conditions for Electronic Documents www.sgs.com/terms-and-conditions-for-electronic-documents. Attention is drawn to the limitation of liability, indemnification and jurisdiction clauses detailed therein. Any holder of this document is advised that information contained herein reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not associate parties to a transaction here excepting all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification in the content or appearance of this document is unlawful and illegitimate and may be prosecuted to the fullest extent of the law."			
SGS Taiwan Ltd. 台灣檢驗科技股份有限公司 No. 31, Wu Ching Road, New Taipei Industrial Park, YU KI CHANG, New Taipei City, Taiwan / 新莊市吳興路31號 廣業區 t (886-2) 2286-9999 f (886-2) 2286-3227 www.sgs.com Member of the SGS Group			

SGS

- * Animal imitation, Test-Single- Exposure Test
- * Closed- Patch Test (buehler test)

One Sample of Woven Fabric
70D NYLON Taffeta Coating
TPU.

- * Animal Imitation Test- Single-
At Each Observation Time point.
The Highest Integral is 0
(Evaluated as Negligible).
- * Closed- Patch Test:
The Sensitized Rate of the
Sample on Guinea Pigs is 0%
(evaluated as very gently).

Textile Laboratory		No: TX323263 /2016 /JA	Date: June 20, 2016	Page 2 of 5
Test Report				
Test Results:				
1 · Animal Irritation test—Single-exposure test				
Test Criterion :	ISO 10993-10:2010			
Test Type :	Animal irritation test—Single-exposure test			
Test environment :	Rabbit room of conventional condition. Usage License No. SYXK (Zhe) 2011-0158, Room temperature 20.4℃ ~23.1℃; Relative humidity 45.8%~69.2%.			
Test animals :	New Zealand White Albino Rabbit, supplied by Yinhai rabbit specialty cooperative organization of Tongxiang Zhejiang Province, Production License No. SCXK (Zhe) 2013-0056.			
No. of animals/sex :	3/not specified			
Observation period :	Record the appearances of the application site at 1h, 24h, 48h and 72h following removal of the patches. Extended observation can be necessary if there are persistent lesions, in order to evaluate the reversibility or irreversibility of the lesions. This need not exceed a period of 14 d.			
Test method :	The sample was prepared into 0.5% solution with DI water. 0.5mL 0.5% solution was applied to clipped test site and occluded for 4 hours. Test site then wiped clean with lukewarm water.			
Results :	At each observation time point, the highest integral is 0.			
Conclusions :	According to irritation response categories in rabbit, the test sample is Negligible to the skin.			
2 · Closed-patch test (Buehler test)				
Test Criterion :	ISO 10993-10:2010			
Test Type :	Closed-patch test (Buehler test)			
Test environment :	Guinea pig room of conventional condition. Usage License No. SYXK (Zhe) 2011-0158, Room temperature 22.1℃ ~23.2℃; Relative humidity 54.9%~62.8%.			
Test Animals :	Guinea pigs, 300-500g, Supplied by Jianfei laboratory animal farm, Simen town, Yuyao city. Certificate No. SCXK (Zhe) 2012-0050.			
No. of Animals/Sex :	test group:16; control group:16; sex not specified			
Sample Pretreatment :	Take the sample into extracts liquid before test.			

*These findings stated the results drawn in this test report rely only in the sample(s) tested, and result sample(s) are intended for 3 months only." This test report cannot be reproduced, except without prior written permission of the Company.
This document is issued by the Company subject to its General Conditions of Service printed opposite, available on request or accessible at <www.hongkang.com.cn>, for all documents, subject to Terms and Conditions for Electronic Documents (www.hongkang.com.cn/terms-and-conditions.html) and/or Terms and Conditions for Electronic Documents (www.hongkang.com.cn/terms-and-conditions.html).
This document is drawn up for the limitation of liability, indemnification and jurisdiction issues outlined therein. Any failure of HONGKANG LABORATORY to detect that laboratories contained herein perform the Company's tests of its laboratories only and within the limits of Client's Instructions, if any. The Company's work responsibility is in the Client and this document does not constitute evidence to a third party from their rights and obligations prior to the transaction documents. This document cannot be implemented being in full, without prior written approval of the Company. Any unauthorized alteration, forgery or the executed or reproduction of this document is voidful and ineffective and will be prosecuted to the fullest extent of the law."


Hong Kong Testing Laboratories Limited
 香港檢驗有限公司
 No. 21, Yiu Cheung Road, New Taipei Industrial Park, Wu Jia Chuan, New Taipei City, Taiwan 10642 台北縣中和區豐華路21號 11樓
 T +886-(2) 2298-1888 F +886-(2) 2298-1227 www.hklab.com.tw

Memoir of the CDSI Group

Textile Laboratory
Test Report

No: TX33263 /2016 /JIA

Date: June 20, 2016

Page 3 of 5

Test Procedure :

1. Closely clip the fur on the left upper back of the guinea pigs 24h prior to test. The scope is 3cm×3cm.
2. Induction phase: Administer the test sample by topical application to the clipped left upper back region of each animal using appropriate patches soaked in the test sample. Remove the restrainer of any occlusive dressings and patches after 6 h. Perform this procedure on three days a week for three weeks. Treat the control animals similarly, using the blank liquid alone.
3. Challenge phase : At 14 d after the last induction application, challenge all test and control animals with the test sample. Administer the test sample by a single topical application to a clipped untested area of each animal using appropriate patches soaked in the test sample. Remove the restrainer and occlusive dressings and patches after 6 h.
4. Observation of animals : Observe the skin reaction at 24h and 48h after the primary challenge.

Results :
Conclusions :
The sensitized rate of the sample on guinea pigs is 0%.
No skin allergies was found for the sample.

3 - Results schedule

Table 1—score of skin reaction

Animal number	skin application sites	1h			24h			48h			72h		
		Erythema and eschar for mat ion	Oedema for mat ion	Total score	Erythema and eschar for mat ion	Oedema for mat ion	Total score	Erythema and eschar for mat ion	Oedema for mat ion	Total score	Erythema and eschar for mat ion	Oedema for mat ion	Total score
1	Front of Left (Test sample)	0	0	0	0	0	0	0	0	0	0	0	0
	Front of Right (control)	0	0	0	0	0	0	0	0	0	0	0	0
	Behind Left (control)	0	0	0	0	0	0	0	0	0	0	0	0
	Behind Right (Test sample)	0	0	0	0	0	0	0	0	0	0	0	0
2	Front of Left (Test sample)	0	0	0	0	0	0	0	0	0	0	0	0
	Front of Right (control)	0	0	0	0	0	0	0	0	0	0	0	0
	Behind Left (control)	0	0	0	0	0	0	0	0	0	0	0	0
	Behind Right (Test sample)	0	0	0	0	0	0	0	0	0	0	0	0

"Without otherwise stated the results shown in this test report refer only to the sample(s) tested, and each sample(s) is submitted to the Institute only." This test report cannot be reproduced, accepted in full, without prior written permission of the Company.

"This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.bsg.com/terms_and_conditions.htm, and, for electronic format documents, subject to Terms and Conditions for Electronic Documents also printed overleaf and accessible at www.bsg.com/terms_and_conditions.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction clause included therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its issuance only and reflects the findings of the Client's Institution, if any. The Company is not responsible for the Client and this document does not constitute positive or a transaction for acceptance of data rights and obligations under its transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and shall be prosecuted to the fullest extent of the law."

BSI Standards Ltd

Am 21, Via Ciprolet Road, Near Rajpuri Industrial Park, Via K/2 DARGA, New Delhi 110028, India

Tel: 8860-212298-2299

www.bsg.com

Member of the BSI Group

CERTIFICATE



Certification Name:

ISO 10993- 10: 2010

- * Animal imitation, Test- Single- Exposure Test
- * Closed- Patch Test (buehler test)

Material:

One Sample of Woven Fabric
70D NYLON Taffeta Coating
TPU.

Test Result:

- * Animal Imitation Test- Single- At Each Observation Time point. The Highest Integral is 0 (Evaluated as Negligible).
- * Closed- Patch Test: The Sensitized Rate of the Sample on Guinea Pigs is 0% (evaluated as very gently).

Textile Laboratory

Test Report

No: TX33263 /2016 /JA

Date: June 20, 2016

Page 4 of 5

3	Front of Left (Test sample)	0	0	0	0	0	0	0	0	0	0	0	0
	Front of Right (control)	0	0	0	0	0	0	0	0	0	0	0	0
	Behind Left (control)	0	0	0	0	0	0	0	0	0	0	0	0
	Behind Right (Test sample)	0	0	0	0	0	0	0	0	0	0	0	0
Average of score (control)		0				0				0			
Average of score (Test sample)		0				0				0			

Table 2 — Primary or cumulative irritation index categories in rabbit

Mean score	Response category
0~ 0.4	Negligible
0.5 ~ 1.9	Slight
2 ~ 4.9	Moderate
5 ~ 8	Severe

Table 3. The result of the skin sensitization test

groups	Number of animals	Induction dose	Challenge dose	observation time	Sensitization Intensity									Number of positive animals	Rate of sensitization %
					erythema						edema				
					0	1	2	3	4	0	1	2	3		
experiment group	16	observation time	observation time	24h	16	0	0	0	0	16	0	0	0	0	
				48h	16	0	0	0	0	16	0	0	0	0	
Negative controls	16	/	/	24h	16	0	0	0	0	16	0	0	0	0	
				48h	16	0	0	0	0	16	0	0	0	0	
Positive controls	16	0.6 %	0.3%	24h	0	8	6	2	0	2	10	4	0	87.50	
				48h	2	9	5	0	0	5	9	2	0	12	75.00

"Unless otherwise stated the results shown in this test report refer only to the sample(s) tested, and each sample(s) are obtained for 2-replicate only." This test report cannot be reproduced, except in full, without prior written permission of the Company.

"This document is issued by the Company subject to its General Conditions of Service printed on request or accessible at www.sgs.com/terms_and_conditions.htm, and, for electronic format documents, subject to Terms and Conditions for Electronic Documents accessible at www.sgs.com/terms_and_conditions.htm.

Attention is drawn to the limitation of liability, indemnification and jurisdiction issues outlined therein. Any failure of this document to achieve that responsibility outlined herein reflects the Company's findings at the time of its issuance only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not constitute parties to a transaction from accepting all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law."

SGL Service Ltd. | No. 31, Wu Chuan Road, New Taipei Industrial Park, Wu Jui District, New Taipei City, Taiwan | 新台北工業區吳佳路31號 3F樓
 台灣檢驗科技股份有限公司 | 10662-2399-0000 | 10662-2399-3327 | 00662-8490000 | Member of the SGS Group

Textile Laboratory

Test Report

No: TX33263 /2016 /JA

Date: June 20, 2016

Page 5 of 5

Table4 —Grading of skin sensitization intensity

rate of sensitization %	Sensitization Intensity
0 ~ 8	Very Gently
9 ~ 28	Gently
29 ~ 64	Moderate
65 ~ 80	Severe
81 ~ 100	Very Severe

Note: when the rate of sensitization is 0% , the sensitization intensity can be determine to no skin allergies was found.

Tested by relevant SGS laboratory.

*** End of Report ***

"Unless otherwise stated the results shown in this test report refer only to the sample(s) tested, and each sample(s) are obtained for 2-replicate only." This test report cannot be reproduced, except in full, without prior written permission of the Company.

"This document is issued by the Company subject to its General Conditions of Service printed on request or accessible at www.sgs.com/terms_and_conditions.htm, and, for electronic format documents, subject to Terms and Conditions for Electronic Documents accessible at www.sgs.com/terms_and_conditions.htm.

Attention is drawn to the limitation of liability, indemnification and jurisdiction issues outlined therein. Any failure of this document to achieve that responsibility outlined herein reflects the Company's findings at the time of its issuance only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not constitute parties to a transaction from accepting all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law."

SGS Service Ltd.
台灣檢驗科技股份有限公司

No. 31, Wu Chuan Road, New Taipei Industrial Park, Wu Jui District, New Taipei City, Taiwan | 新台北工業區吳佳路31號 3F樓
10662-2399-0000

10662-2399-3327
00662-8490000

www.sgslab.com
www.sgsgroup.com

Member of the SGS Group

M


MISCELLANEOUS

Our quality, insist on providing you most concerned about



Product Feature & Information:

- * Extremely waterproof, transparent, easy to printing, wind- break, anti-aging, weather resistant, long- term skin contact permissible, and anti- bacterial.
- * Repeated high pressure air- filled, light, biocompatible (without solvent,without any cells harmed after long- term skin contact), compatible with anti- microbes.
- * Without organic solvents, heavy metals, azo dyes, passing the 168 substances of REACH SVHC (Substances of Very High Concern, SVHC) screening under the EU REACH regulation, no allergic reaction caused by exposure to TPU leather, natural, and passing the bio- compatibility test ISO- 10993, suitable for chronic bedridden patients.

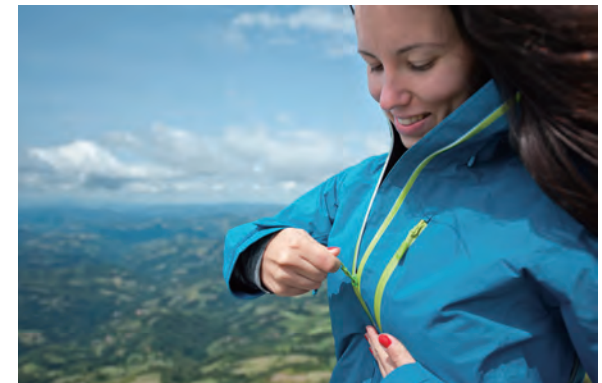

ALIPHETIC TYPE TPU FLIM FOR GLASS LAMINATION

Specification:

Material No HMGL – 1070-038 / HMGL – 1070-076
Thick 0.38mm / 0.76mm
Color Clear
Width 100cm/ 120cm/ 150cm

Feature:

- * High security to building which will get more seismic- resistance, anti- theft, explosion-proof than general glass window.
- * UV yellowing & high transparent.
- * The emboss roller transfer make film get double-sided exhaust effect which suits process and not enclose the air.

Application:

- * Building& Furniture.
- * Car windshield.
- * Used in explosion-proof & bullet-proof.




Laminated Glass TPU Film

Physical Properties:

Item of Test	Unit	Method	Result
Gauge	mm		0.38 0.76
Hardness	Shore A	Shore A	75A
100% Modulus	Kg/cm ²	JIS-7311	39.4
300% Modulus	Kg/cm ²	JIS-7311	84.43
Tensile strength	Kg/cm ²	JIS-7311	200 ↑
Elongation	%	JIS-7311	400 ↑
Tear strength	Kgf/mm	JIS-7311	6.4
Specific gravity		JIS-7311	1.1
Transmittance	%	JIS-7105	90 ↑
Melting Temperature(DSC)	°C	ASTM D 3418	110~120

keep cool area and no direct sunlight place, bellow 30°C & 50% relative humidity

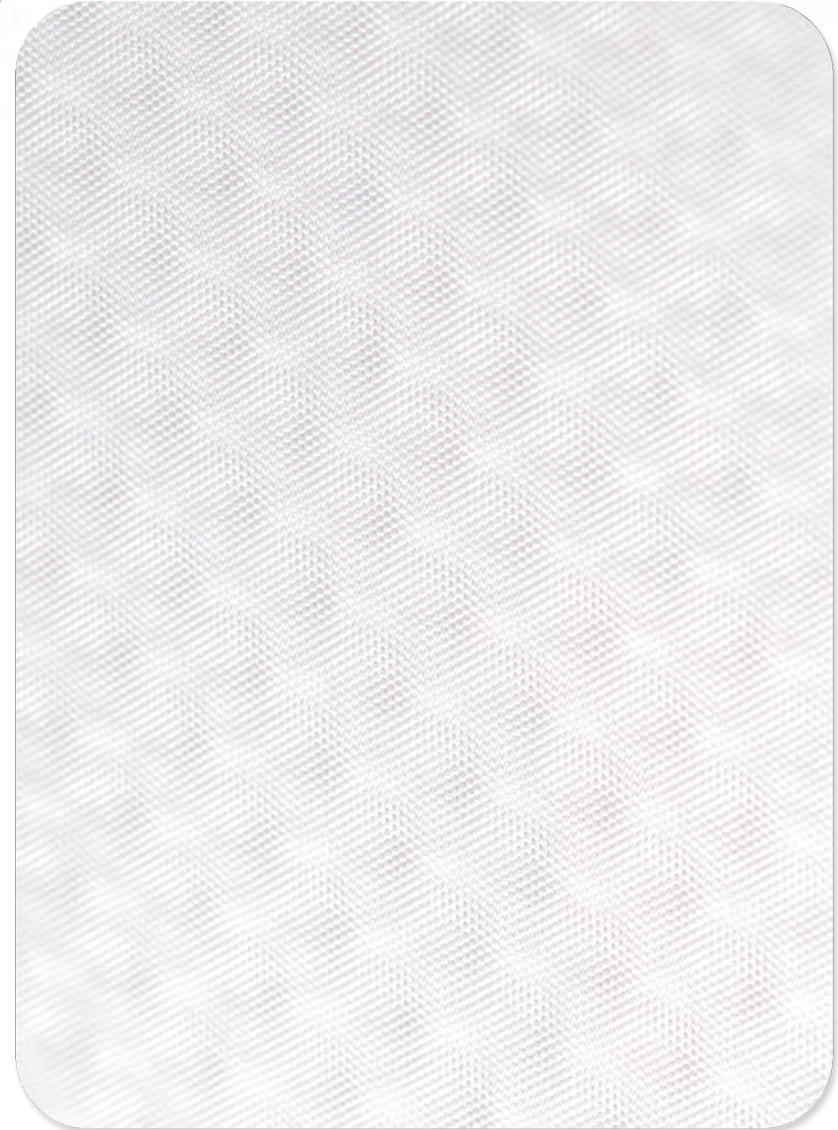

CAR PROTECTOR FILM TPU FILM

Specification:

Material No HMPF – 1080
Thick 0.05mm - 0.20mm
Color Clear
Width 100cm/ 120cm/ 150cm

Feature:

- * The highly protecting car from our TPU FILM which will get the perfect adhesive, transparent, optical and even get the low- temperature impact protection.
- * UV yellowing& high transparent
- * The emboss roller transfer make film get double-sided exhaust effect which suits process and not enclose the air.

Application:

- * Vehicle exterior the part of (Hood, Bumpers, Fenders, Doors, Rear Quarter, Rear Deck, Roof etc.)
- * Electronics protect film



Car Protector TPU Film

Physical Properties:

Item of Test	Unit	Method	Result
Gauge	mm		0.05-0.20
Hardness	Shore A	ASTM D 2240	90A
Specific gravity	--	ASTM D 792	1.1
100% Modulus	Kg/cm ²	JIS-7311	90 ↑
300% Modulus	Kg/cm ²	JIS-7311	280 ↑
Tensile Strength	Kg/cm ²	JIS-7311	400 ↑
Elongation	%	JIS-7311	300 ↑
Tear Strength	Kgf/mm	JIS-7311	6 ↑
UV Yellowing	Grade	ASTM D 4329	5 ↑
Transmittance	%	JIS-7105	90 ↑

*keep cool area and no direct sunlight place, bellow 30°C & 50% relative humidity

TPU HOTMELT FILM POLYETHER & POLYESTER TYPE'S

Specification:

Material No HMES – 1060
Thick 0.15mm / 0.10mm / 0.05mm
Color Clear
Width 150cm
Package 100 yards/roll

Feature:

* NAN YA Polyurethane type hot melt film which has high extension, high adhesive strength and washable.

Application:

- * Functional Spandex adhesive
- * Tights inner & under wear.
- * Apparel intimates.
- * Shoes material.




Tpu Hotmelt Film for Polyether Type

Physical Properties:

Item of Test	Unit	Method	Result
Gauge	mm		0.05mm 0.10mm 0.15mm
Hardness	Shore A	ASTM D 2240	60A
100% Modulus	Kg/cm ²	JIS-7311	18±2
300% Modulus	Kg/cm ²	JIS-7311	26±3
Tensile Strength	Kg/cm ²	JIS-7311	100 ↑
Elongation	%	JIS-7311	1000 ↑
Melting point	°C	ASTM D 3418	105
Specific gravity		ASTM D 792	1.19
UV yellowing(Grade)		ASTM D 4329	4 ↑

keep cool area and no direct sunlight place, bellow 30°C & 50% relative humidity.

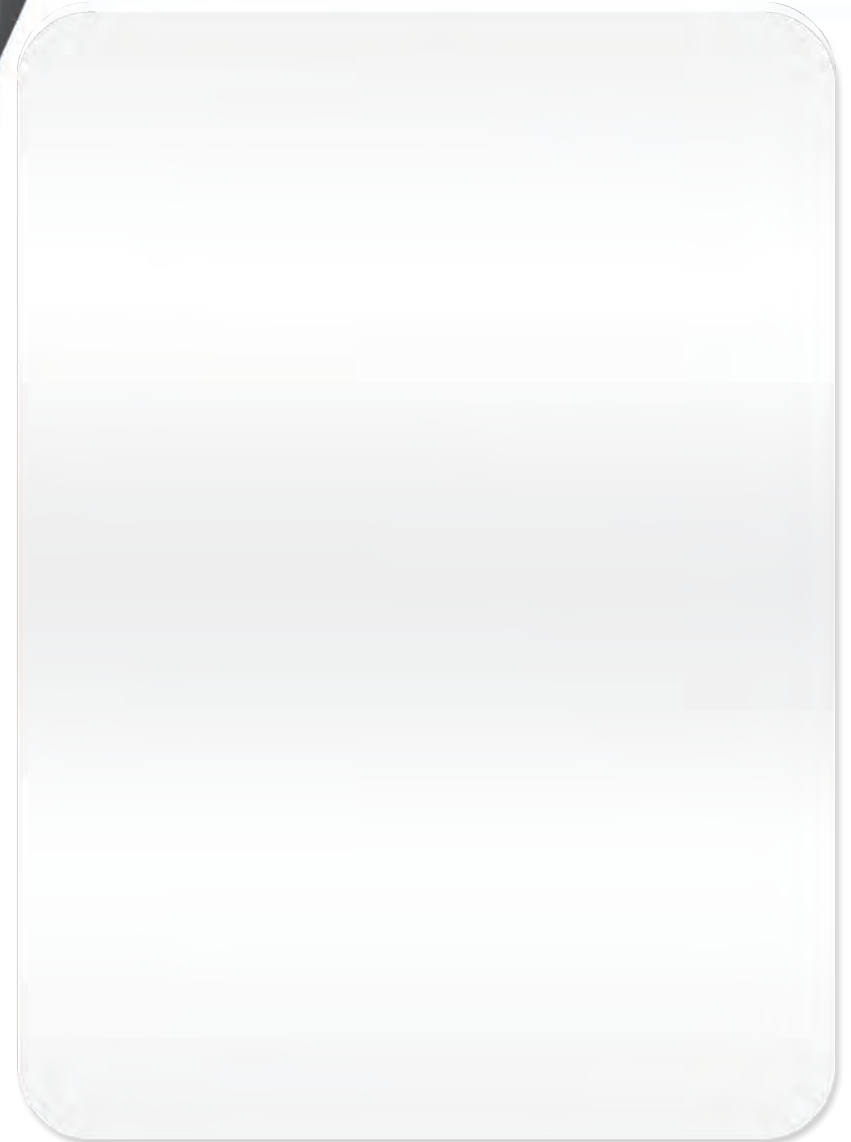



Our quality, insist on providing you most concerned about

Product Feature & Information:

- * Extremely waterproof, transparent, easy to printing, wind-break, anti-aging, weather resistant, long- term skin contact permissible, and anti- bacterial.
- * Repeated high pressure air- filled, light, biocompatible (without solvent,without any cells harmed after long- term skin contact), compatible with anti- microbes.
- * Without organic solvents, heavy metals, azo dyes, passing the 168 substances of REACH SVHC (Substances of Very High Concern, SVHC) screening under the EU REACH regulation, no allergic reaction caused by exposure to TPU leather, natural, and passing the bio- compatibility test ISO- 10993, suitable for chronic bedridden patients.



FOR OUTDOOR

TPU FILM TPU/ PU SYNTHETIC

Specification:

Material No	Topular Series
Color	Customized
Emboss	Release paper customized
Fabric	Nylon 70D~1680D
MOQ	300y

Feature:


- * Suitable to overlap H-F Welding, etc
- * Easily to process can TPU+PU/ PU+TPU
- * Have waterproof function

Application:

- *Water / Outdoor sports equipment
- *Briefcase
- *Bags & Luggage



TPU Film TPU/ PU Synthetic

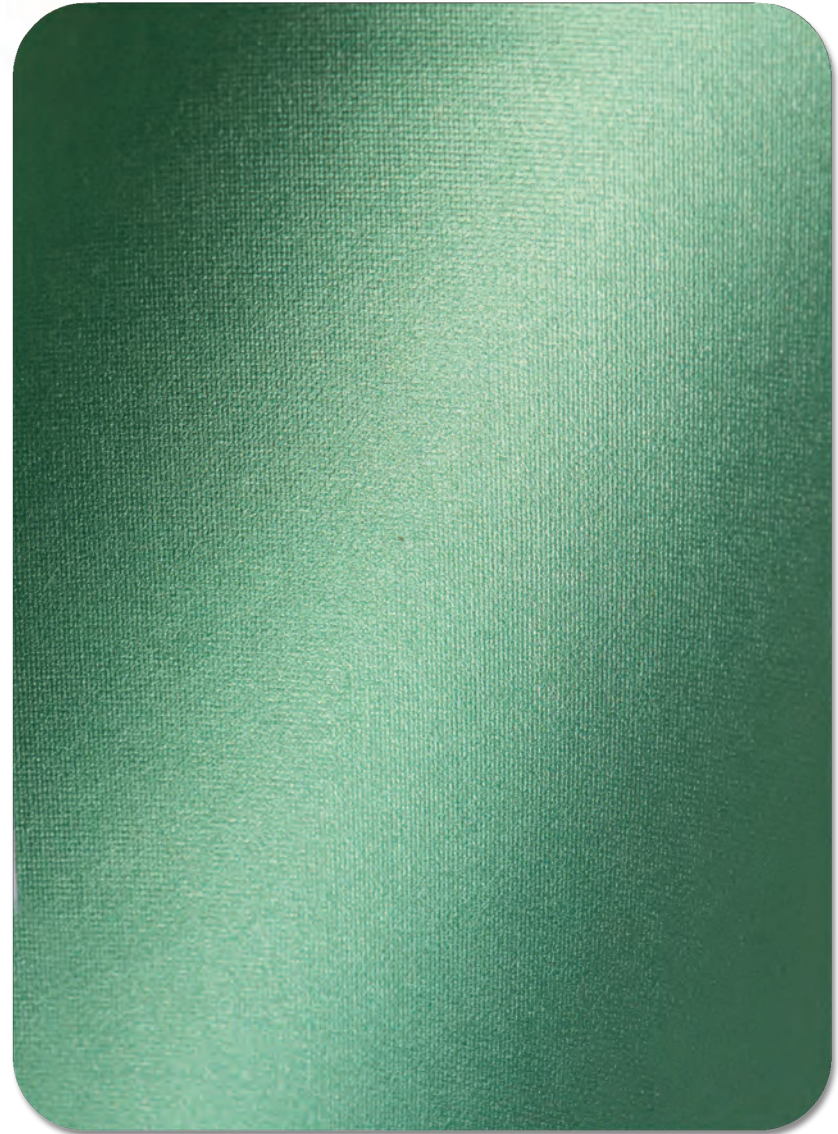

FOR OUTDOOR

TPU POPLON

Specification:



Material	Poplon
Spec	Customized
Color	Transparent
Emboss	Roller
MOQ	300y

Feature:

- * Can single side or double side lamination.
- * Perfect physical properties, easy to process.

Application:

- * Briefcase, Bags, Luggage.
- * Side strap& Reinforcement material for shoes.
- * Air mattress, Medical mattress.

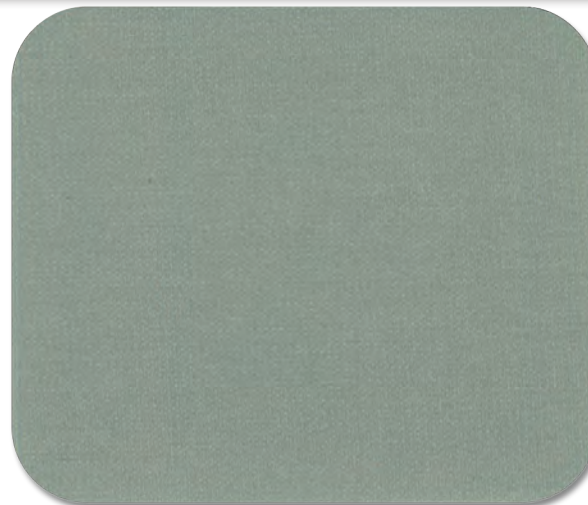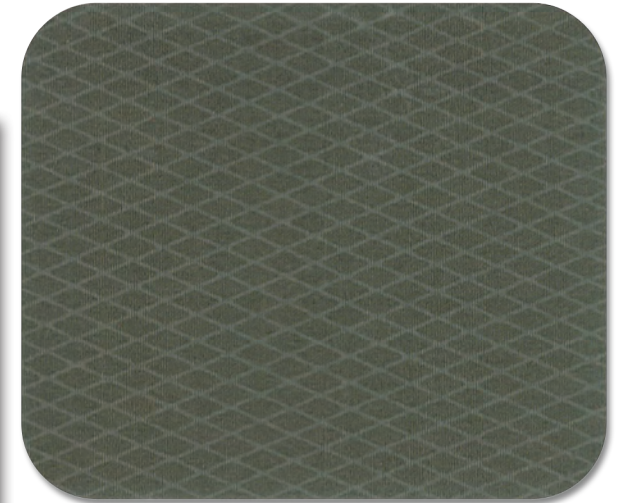

FOR OUTDOOR

TPU FILM SUNRISE

Specification:


Material No	Sunrise
Thick	0.50mm
Color	Only transparent and black color are available
Emboss	Roller
Width	54"
MOQ	100y

Feature:

- * For no-sew, fusing operation.
TPU film easy to process
- * Carbon fiber appearance effect

Application:

- * Shoes upper reinforcement.
- * Shoes decoration.

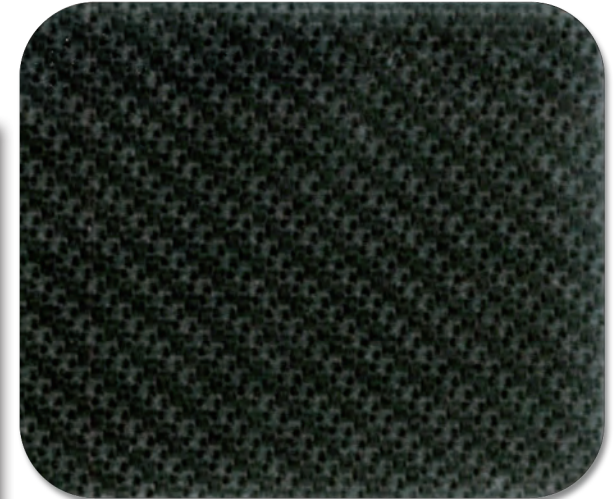

FOR OUTDOOR

TPU FOAM

Specification:

Material No	TPU FOAM
Thick	1.6mm
Color	White& black
Emboss	Roller
Width	54"
MOQ	1,000y

Feature:

- * Good for high frequency process
- * Perfect hand touch

Application:

- * Applicable to environmental friendly sponge, packing, filler etc.



S

SHOES MATERIAL

Our quality, insist on providing you most concerned about

Product Feature & Information:

- * Extremely waterproof, transparent, easy to printing, wind- break, anti-aging, weather resistant, long- term skin contact permissible, and anti- bacterial.
- * Repeated high pressure air- filled, light, biocompatible (without solvent,without any cells harmed after long- term skin contact), compatible with anti- microbes.
- * Without organic solvents, heavy metals, azo dyes, passing the 168 substances of REACH SVHC (Substances of Very High Concern, SVHC) screening under the EU REACH regulation, no allergic reaction caused by exposure to TPU leather, natural, and passing the bio- compatibility test ISO- 10993, suitable for chronic bedridden patients.



TPU FILM ULTRA IMAGE HM.

Specification:



Material No	Ultra Image HM
Thick	0.40mm
Color	Customized
Emboss	Release paper customized
Width	54"
MOQ	100y

Feature:

- * New developing Dry PU + hot-melt film
- * For seamless, no-sew, weldable operation
- * Hot melt film combined together already, easy to process.

Application:

- * Shoes material
- * Water / Outdoor sports equipment
- * Briefcase , Bags , Luggage

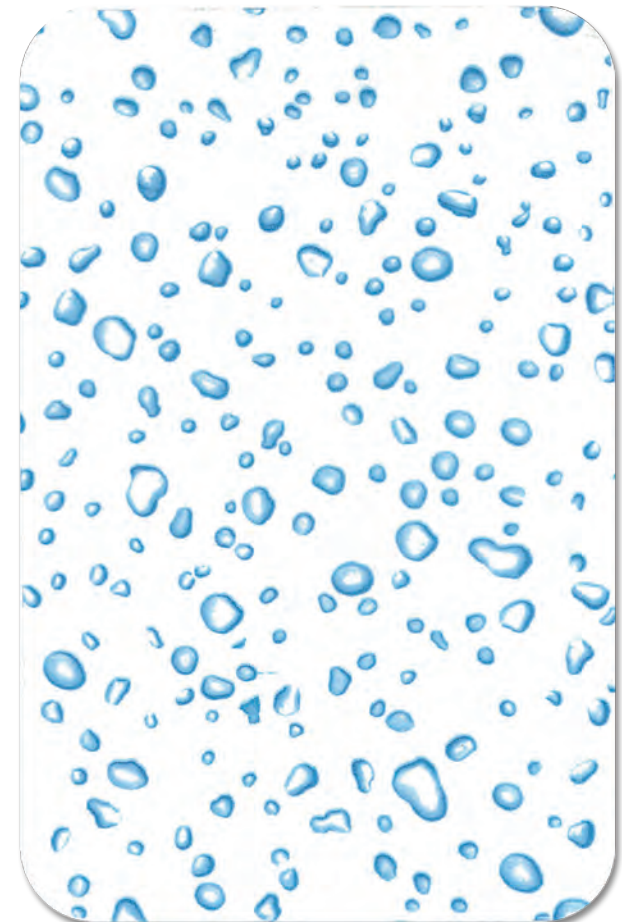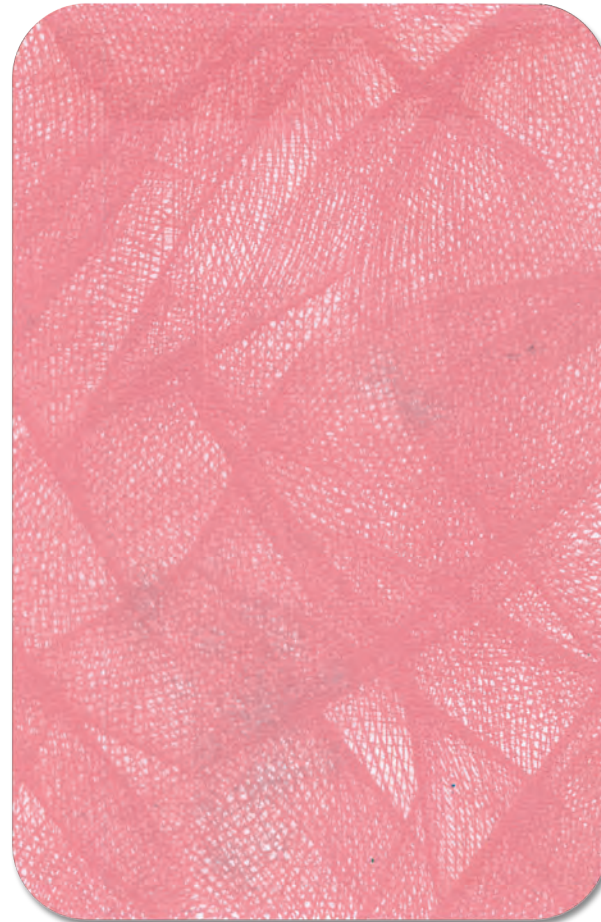

TPU FILM

UPPITOL

Specification:

Material No	Uppitol
Spec	0.50mm*54"
Color	Customized
Emboss	Release paper customized
MOQ	100y

Feature:

- * Lots of emboss can select.
- * Hot melt can combined together, easy to process.

Application:

- * Upper of shoes, Logo, Vacuum forming Side strap for shoes.
- * Air bag / bed , Handbag
- * Suitable to melt cutting, etc.



PASTER NEON LX HM TPU FILM

Specification:

Material	Paster Neon LX HM
Thick	0.3-0.4mm
Color	Customized
Emboss	Customized
Width	54"
MOQ	100y




Feature:

- * With hot melt film combined, easy to process.
- * Special PP synthetic paper with Neon & translucent effect.

Application:

- * Shoes materials.

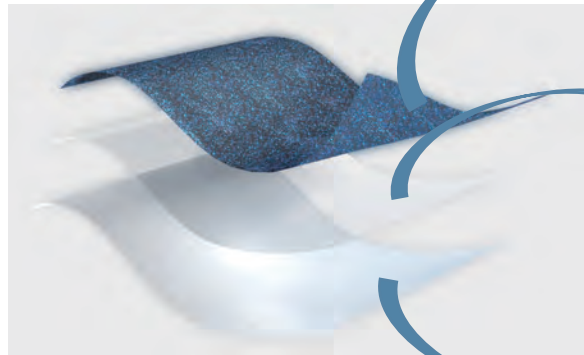

Dry PU


- * Customized for color & release paper

Hot Melt Film (0.1-0.2mm)

- *Coating with dry pu fabric

PP Synthetic Paper

- *Easily peeling when roll package

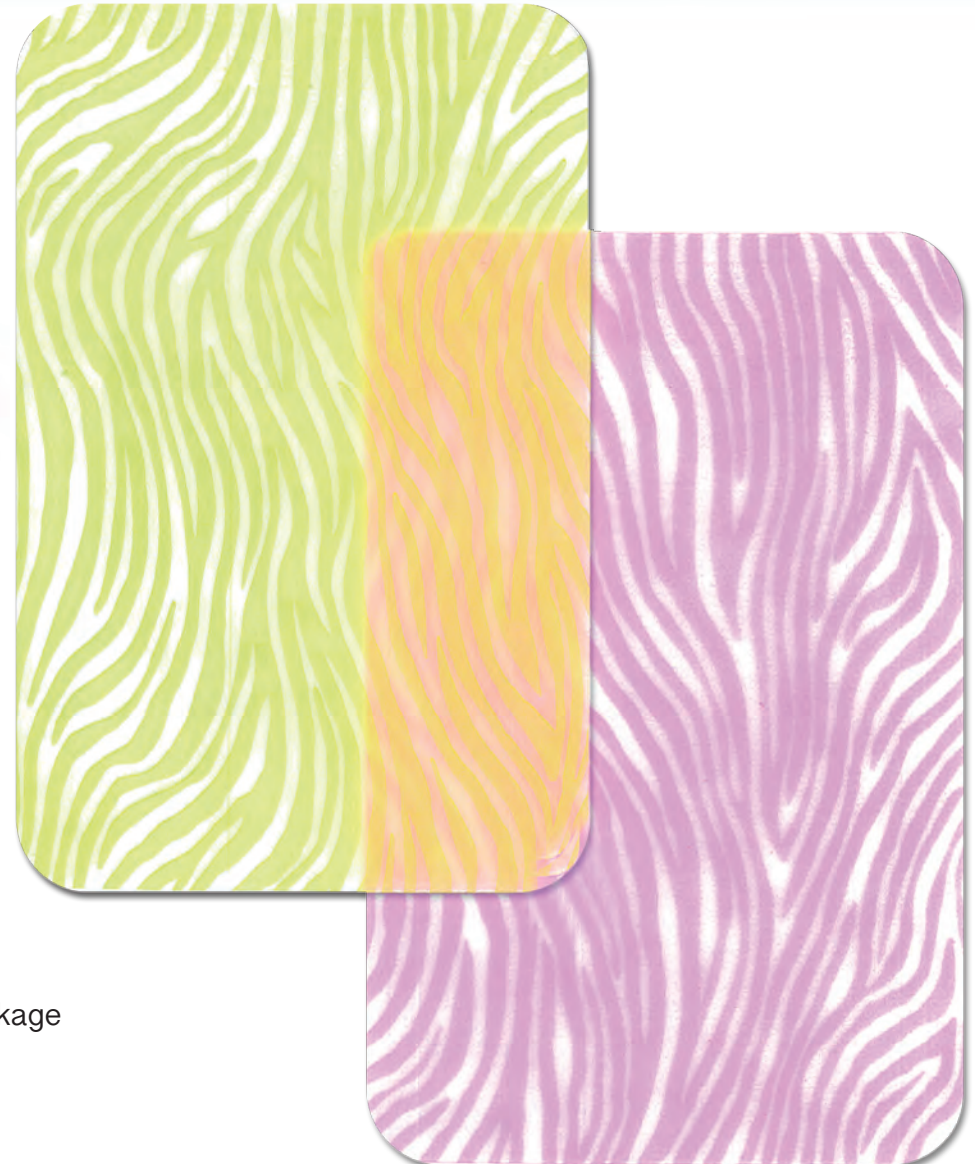

CUTTER MATESHINE HM TPU FILM

Specification:

Material	Cutter Mateshine HM
Thick	0.4-0.6mm
Color	Customized
Emboss	Customized
Width	54"
MOQ	100y




Feature:

- * For seamless, no sew, fusing operation.
- * 3D release paper with Mateshine color effect. Only 4 basic colors available.

Application:

- * Shoes materials.

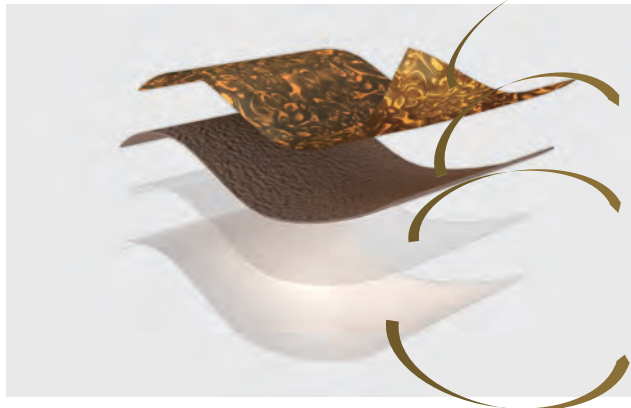

Dry PU

- * Customized for color & release paper

Wet PU (0.25mm~0.4mm)



- * Promote hand touch feeling

Hot Melt Film (0.1-0.2mm)

- * Coating with dry PU fabric

PP Synthetic Paper

- * Easily peeling when roll package

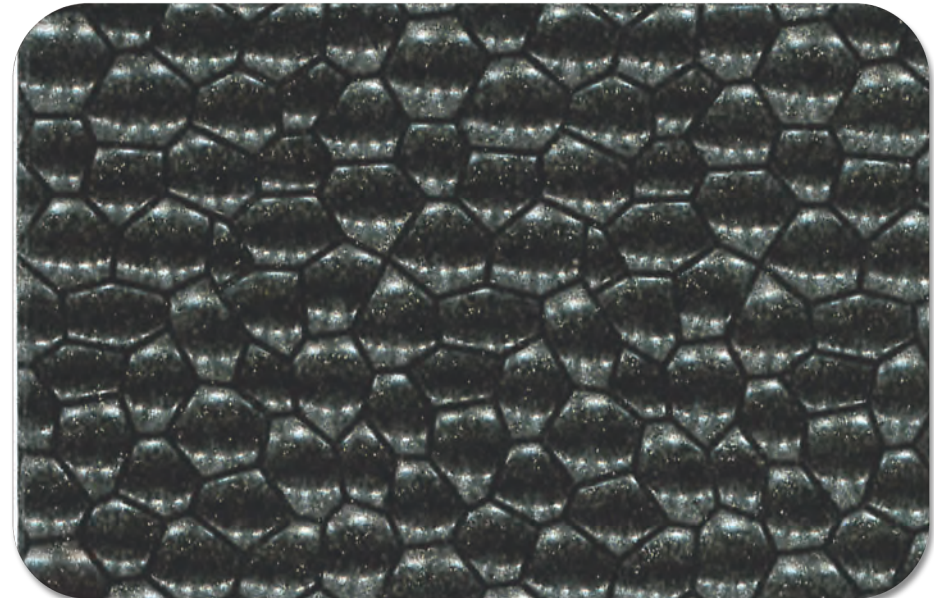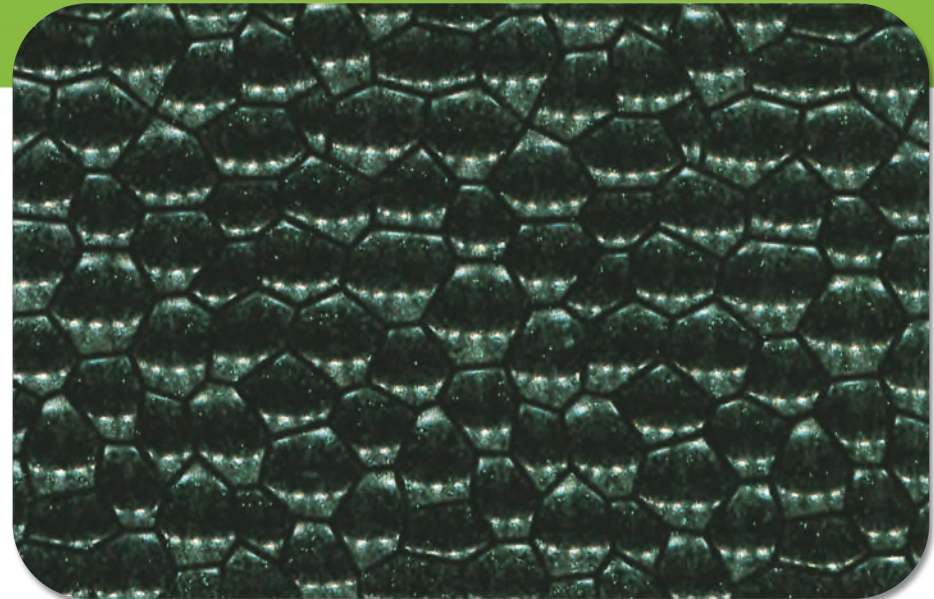

ULTRA NEON HM TPU FILM

Specification:

Material	Ultra Neon HM
Thick	0.4-0.7mm
Color	Customized
Emboss	Customized
Width	54"
MOQ	100y

Feature:

- * With hot melt film combined, easy to process.
- * Geometry design and Neon color effect. Other colors are available.

Application:

- * Shoes materials.



Dry PU

- * Customized for color & release paper

TPU film (0.1-0.4mm)

- * Perfect physical properties & promote touch feeling

Hot Melt Film (0.1-0.2mm)

- * Coating with dry PU fabric

PP Synthetic Paper

- * Easily peeling when roll package

TAIWAN NAN YA TPU FILM SPECIFICATION

Product Name	Feature	Fabric	Application	Specification	Unit	Remark
TPU FILM	ETHER (ANTI- HYDROLYSIS)	CUSTOMIZED	Water proof bag/ Clothes/ Medical ect	0.10- 0.80 mm" 54" - 60"	YARD	MOQ 300Y
	ETHER (HYDROLYSIS)		Water proof bag/ Clothes/ Shoes	0.10- 0.60 mm" 41" - 58"		
TPU HOT MELT	ETHER (ANTI- HYDROLYSIS)	CUSTOMIZED	Any adhesive for dry or wet PU leather	0.05- 0.30 mm" 39" - 56"	YARD	MOQ 300Y
	ETHER (HYDROLYSIS)					
SIDED LAMINATION TPU NYLON	ETHER (ANTI- HYDROLYSIS)	POLY 75D~300D	Medical bed	0.28- 0.50 mm" 46" - 58"	YARD	MOQ1000Y
		NYLON 70D		0.17- 0.28 mm" 45"- 58"		MOQ 300Y
		NYLON 210D		0.28- 0.35 mm" 46"- 62.5"		
		NYLON 420D		0.30- 0.55 mm" 58"		
		NYLON 840D		0.40/ 0.50 mm" 58"		
	ETHER (HYDROLYSIS)	POLY 750D	Medical bed	0.23 mm" 4.15"- 62"	YARD	MOQ 300Y
		POLY 300D		0.50 mm" 54"- 58"		
		NYLON 70D		0.17- 0.3 mm" 41.5"- 62.5"		
		NYLON 210D		0.28/ 0.35 mm" 58"/ 60"		
		NYLON 420D		0.32- 0.48 mm" 58"		
		NYLON 1680D		0.60 mm" 54"		
DOUBLE- SIDED LAMINATION TPU NYLON	ETHER (ANTI- HYDROLYSIS)	NYLON 210D	Medical bed	0.40/ 0.45/ 0.60 mm" 58"	YARD	MOQ 300Y
		NYLON 420D		0.45- 0.70 mm" 54" / 58"		
		NYLON 840D	Medical bed yellowing resistant	0.60 mm" 58"		
		NYLON 1680D		0.80 mm" 54"		
		P2000D	Medical bed	1.20/ 1.40 mm" 58"		
		P750 / 1200D		1.00 mm" 54"		
	ETHER (HYDROLYSIS)	NYLON 210D	Medical bed	0.4 mm" 58"	YARD	MOQ 300Y
		NYLON 420D		0.45- 0.50 mm" 54" / 58"		
		NYLON 840D	Medical bed yellowing resistant	0.50- 1.30 mm" 54" / 58"		
		NYLON 1680D	Medical bed	0.70- 0.80 mm" 54"		

NAN YA MATERIAL CHALLENGE NEW VISION WITH YOU



南亞塑膠工業股份有限公司
NAN YA PLASTICS CORPORATION

Sales 3rd Department, Plastics 1st Division

Address: Room 502, 3F, 201, Tung Hwa N.Rd., SongShan

District(10508), Taipei, Taiwan, R.O.C.

TEL: +886-2-2717-8249

Mobile: +886-932-621151

E-MAIL: ggjvgj@npc.com.tw



南亞塑一部
合成皮網頁